

DATASHEET

Fiber Optic Splice Closure-Vertical Type

Offer optical transmission link, to provide through, branching connection and related connecting protection.



RoHS



OMC INDUSTRY CO.LIMITED

What is Fiber Closure?

Fiber closure, also known as fiber optic splicing closures, is a device used to provide space and protection for fiber optic cables spliced together. The fiber optic closure connects and stores optical fibers safely either in the outside plant or indoor buildings. It can provide protection for the fiber joint and the fiber cables since they have excellent mechanical strength and strong out shell, which ensures the joints are not damaged by the hostile environment.

Types of Fiber Optic Closure


No matter the size, types, and configuration of your network, protecting the connectivity is what counts. According to different applications, there are various types of fiber optic closures in the market for users to choose from and help them protect their networks.

Horizontal Type Fiber Optic Closure

Horizontal type fiber closure has a flat or cylindrical outer housing to provide space and protection for fiber optic splices. It usually contains one or more fiber splice trays assembled to hold/protect optical fiber splices. The common fiber counts of per splice tray are 6, 12 and 24 fibers. So one fiber closure's splice capacity could cover a range of 6-288Fibers Totally.

They are commonly made of high tensile construction plastic, so they have good adaptability and compression resistance. At the same time, they have good waterproof and dustproof function. If attached to a pole or hung from wiring, these fiber splice closures need to be held firmly in place, to avoid damage from weather and wind. So This type of fiber splice closure is the most commonly used one in mounted aerials or buried underground.

The following picture shows a 96-fiber horizontal fiber optic splice closure. It has two input ports and two output ports providing space for 96 fiber splices. There are four standard 24-fiber splice trays stacked together inside the fiber optic splice closure.

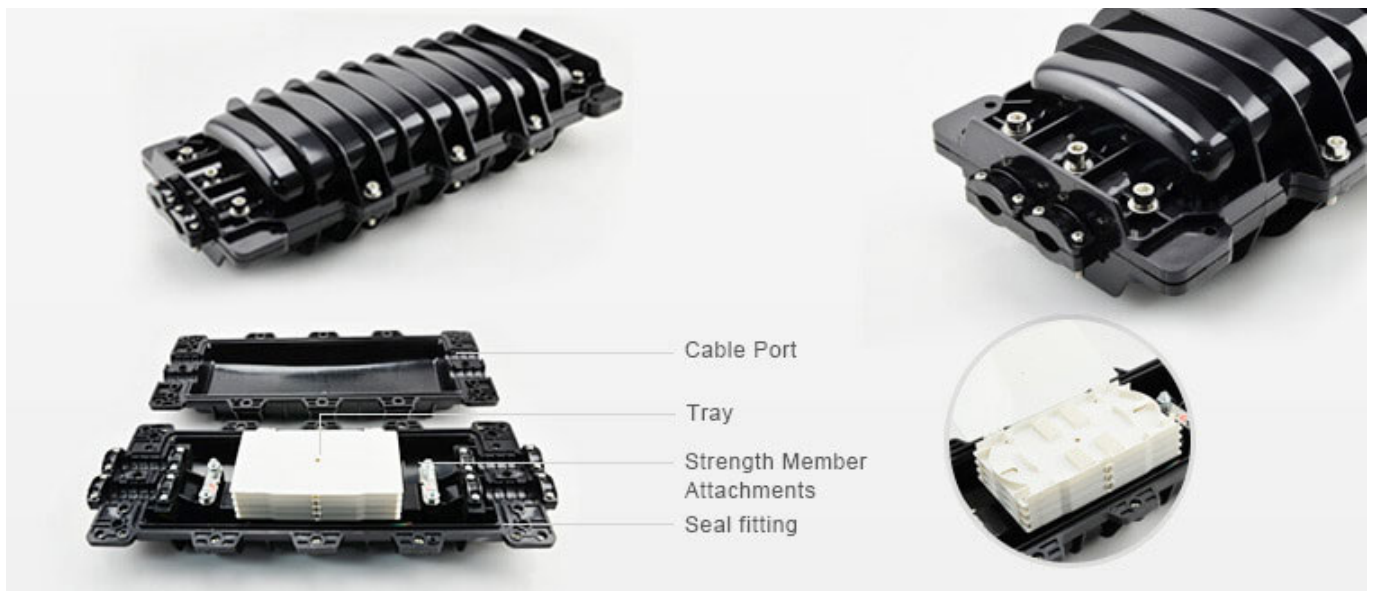

Vertical Type Fiber Optic Closure

Vertical fiber optic closure looks like a dome, thus it is also called dome fiber optic splice closure or fiber dome closure. It usually contains one or more fiber splice trays assembled to hold/protect optical fiber splices. The common fiber counts of per splice tray are 6, 12,16 and 24 fibers. So one fiber closure's splice capacity could cover a range of 6-672 Fibers Totally.

They are commonly made of high tensile construction plastic, so they have good adaptability and compression resistance. At the same time, they have good waterproof and dustproof function. If attached to a pole or hung from wiring, these fiber splice closures need to be held firmly in place, to avoid damage from weather and wind. The dome shape makes it easy to be buried in many applications, though it also can be used above-ground as well.

The following shows a vertical type splice closure which has five entries providing up to 24 fiber optic splices in two 12-fiber splice trays. Different from the above one, the internal fiber splice tray here is suitable for the vertical design of the fiber splice closure.



Things you should know before ordering.

1, Horizontal Type or Vertical Type

Check above

2, Inlet /Outlet Cable ports

The number of ports in a fiber optic closure reflects its capacity to handle the number of cables. The cable entrance capacity of a fiber optic splice closure refers to the number of ports available for terminating cable within the closure. The number of ports provided in a closure depends on factors such as the network capacity and the number of cables employed in the network. Usually, in an attempt to reduce the physical size of high-capacity closures, smaller ports shall be utilized for branch cables and drop cables.

3, Splice Capacities

As per fiber optic cables types deployed in the networks, we could calculate how many fibers will be spliced in the closures, then choose how many splice trays, protection sleeves need to pre-assembled.

4, Sealing Method.

According to different installation environment, we should choose the best Sealing method.

Aerial or Pole mount: Mechanical Sealing

Buried : Heat shrink Sealing

Shaft, Man hole, Duct: Heat shrink Sealing + Mechanical Sealing

5. Bonding & Grounding

Proper bonding and grounding of conductive elements of the optical network shall be provided for the safe deployment and operation of the network.

6. Hardware and Accessors

Aerial fiber optic closures may need to hang on the messenger wire depending on the network configuration. Or they may be attached to the pole. In both cases, extra hardware is required along with the closures. The hardware or accessories to attach and secure should be able to bear wear and tear and also environmental stresses.



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D001

Heat shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 3 round holes for cable entrance
 Suitable for cable diameter 5mm-25mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|---------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 440*190 | 96 Cores | 12F/24F | 1 x oval port 3 x round port | Heat-Shrinkable Seal | 2.3kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D002

Mechanical sealing structure
 High quality industrial plastic body material
 4 round holes for cable entrance
 Suitable for cable diameter 5mm-25mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|---------|----------------|-------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 430*190 | 96 Cores | 12F/24F | 4 x round port | Mechanical Seal | 2.3kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D003

Heat shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 4 round holes for cable entrance
 Suitable for cable diameter 5mm-25mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------------------|------------------|---------------------------------|----------------------|--------|-------|
| Strengthen Polymer Plastic | H*D (mm) 440*190 | Splice Cores 96 Cores | Trays 12F/24F | 1 x oval port 4 x round port | Heat-Shrinkable Seal | 2.3kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D004

Heat shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 4 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------------------|--------------|---------------------------------|----------------------|--------|-------|
| Strengthen Polymer Plastic | H*D (mm) 540*205 | Splice Cores 96 Cores | Trays 24F | 1 x oval port 4 x round port | Heat-Shrinkable Seal | 3.6kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D005

Heat shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 3 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|--------------------------|------------------|---------------------------------|----------------------|--------|----------------|
| Polycarbonate (Strengthen PC) | H*D (mm) 420*190 | Splice Cores 96 Cores | Trays 12F/24F | 1 x oval port 4 x round port | Heat-Shrinkable Seal | 2.5kg | Shiny Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D006

Heat shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 3 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|--------------------------|------------------|---------------------------------|----------------------|--------|----------------|
| Polycarbonate (Strengthen PC) | H*D (mm) 420x190 | Splice Cores 96 Cores | Trays 12F/24F | 1 x oval port 3 x round port | Heat-Shrinkable Seal | 2.5kg | Shiny Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D007

Mechanical sealing structure.
 High quality industrial plastic body material
 4 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|--------------------------|------------------|----------------|-------------------|--------|-------------|
| Polycarbonate (Strengthen PC) | H*D (mm) 395*190 | Splice Cores 96 Cores | Trays 12F/24F | 4 x round port | Mechanical Seal | 2.5kg | Shiny Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D008

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 6 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 240 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|---------------------------|--------------|---------------------------------|----------------------|--------|-------|
| Polycarbonate (Strengthen PC) | H*D (mm) 455*220 | Splice Cores 240 Cores | Trays 24F | 1 x oval port 6 x round port | Heat-Shrinkable Seal | 3.6kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D009

Mechanical sealing structure.
 High quality industrial plastic body material
 6 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 240 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|---------------------------|--------------|----------------|-------------------|--------|-------|
| Polycarbonate (Strengthen PC) | H*D (mm) 450*220 | Splice Cores 240 Cores | Trays 24F | 6 x round port | Mechanical Seal | 3.6kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D010

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 4 or 6 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288 fibers.
 Number of splice trays: 6 pcs x 48F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|---------------------------|--------------------------|--------------------------------------|----------------------|--------|-------|
| Polycarbonate (Strengthen PC) | H*D (mm) 490*220 | Splice Cores 288 Cores | Trays 12F/24F/ 48F | 1 x oval port 4 or 6 x round port | Heat-Shrinkable Seal | 3.6kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D011

Mechanical sealing structure.
 High quality industrial plastic body material
 6 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288 fibers.
 Number of splice trays: 6 pcs x 48F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------------|---------------------|---------------------------|--------------------------|----------------|-------------------|--------|-------|
| Polycarbonate (Strengthen PC) | H*D (mm) 480*220 | Splice Cores 288 Cores | Trays 12F/24F /48F | 6 x round port | Mechanical Seal | 3.6kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D013

Mechanical sealing structure
 High quality industrial plastic body material
 4 round holes for cable entrance
 Suitable for cable diameter 5mm-20mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 48 fibers.
 Number of splice trays: 4 pcs x 12F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|-------------------------------|---------------------|--------------------------|------------------|----------------|-------------------|--------|-------|
| Strengthen Polymer Plastic | H*D (mm) 295x190 | Splice Cores 48 Cores | Trays 12F/24F | 4 x round port | Mechanical Seal | 1.7kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D015

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 3 round holes for cable entrance
 Suitable for cable diameter 5mm-20mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 48 fibers.
 Number of splice trays: 4 pcs x 12F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|------------------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 310*190 | 48 Cores | Trays 12F/24F | 1 x oval port 3 x round port | Heat-Shrinkable Seal | 1.7kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D017

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 4 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 96 fibers.
 Number of splice trays: 4 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|--------------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 460*205 | 96 Cores | Trays 24F | 1 x oval port 4 x round port | Heat-Shrinkable Seal | 2.3kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE: GJS-D021

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 8 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 6 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|-------------------------------|---------------------|--------------|-------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 470*210 | 144 Cores | 24F | 1 x oval port 8 x round port | Heat-Shrinkable Seal | 2.3kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D022

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 4 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 6 pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|-------------------------------|---------------------|--------------|-------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 470*210 | 144 Cores | 24F | 1 x oval port 4 x round port | Heat-Shrinkable Seal | 2.3kg | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D023

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 6 round holes for cable entrance
 Suitable for cable diameter 5mm-38mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288 fibers.
 Number of splice trays: 12pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|--------------|---------------------------------|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 515*310 | 288 Cores | Trays 24F | 1 x oval port 6 x round port | Heat-Shrinkable Seal | 4.5kg | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GJS-D033

Mechanical sealing structure
 High quality industrial plastic body material
 1 mid-span dual holes port and 4 round holes for cable entrance,4 x 4mm grommets accommodate 16 x drop cables.
 Suitable for cable diameter 10mm-25mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 6pcs x 24F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Weight | Color |
|----------------------------|---------------------|--------------|----------------|--|----------------------|--------|-------|
| | | Splice Cores | Trays | | | | |
| Strengthen Polymer Plastic | H*D (mm) 470*210 | 144 Cores | Trays 6x24F | 1 mid-span dual holes port and 4 round holes for cable entrance,4 x 4mm grommets accommodate 16 x drop cables. | Full Mechanical Seal | 3.0kg | Black |



Fiber Optic Splice Closure VERTICAL TYPE : GJS03-M4AX-AL

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 16 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288-672 fibers.
 Number of splice trays: 56 pcs x 12F or : 112 pcs x 4F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-----------------|---------------------|--------------|-------------|----------------------------------|----------------------|-------|
| | | Splice Cores | Trays | | | |
| Modified PP +GF | H*D (mm) 678*312 | 672 Cores | 12F/16F/24F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GP03-M5-D-288

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 16 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288 fibers.
 Number of splice trays: 24pcs x 12F



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-----------------|---------------------|--------------|-------------|----------------------------------|----------------------|-------|
| | | Splice Cores | Trays | | | |
| Modified PP +GF | H*D (mm) 488*246 | 288 Cores | 12F/16F/24F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : GJS-M7-OMC

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 6 round holes for cable entrance
 Suitable for cable diameter 7mm-22mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 12 pcs x 12F
 Splitting: 1x16/1x32 mini PLC splitters and 18pcs/36pcs SC adaptors



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|---------------------------|-----------------|---------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 440*230 | Splice Cores 144 Cores | Trays 8F/16F | 1 x oval port 6 x round port | Heat-Shrinkable Seal | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GJS-M11/RS-A

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 10 round holes for cable entrance
 Suitable for cable diameter 7mm-12mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 6pcs x 24F
 Splitting: 1x16/1x32 mini PLC splitters



Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|---------------------------|------------------|----------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 440*230 | Splice Cores 144 Cores | Trays 12F/24F | 1 x oval port 10 x round port | Heat-Shrinkable Seal | Black |



Fiber Optic Splice Closure VERTICAL TYPE : GJS-M11/RS-B-144

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 10 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 144 fibers.
 Number of splice trays: 9 pcs x 16F




Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|--------------|-------|----------------------------------|----------------------|-------|
| | | Splice Cores | Trays | | | |
| Modified PP | H*D (mm) 320*230 | 144 Cores | 16F | 1 x oval port 10 x round port | Heat-Shrinkable Seal | Black |

Fiber Optic Splice Closure VERTICAL TYPE : GJS-M11/RS-B-288

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 10 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial, underground, pipeline, man holes, hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288 fibers.
 Number of splice trays: 18pcs x 16F

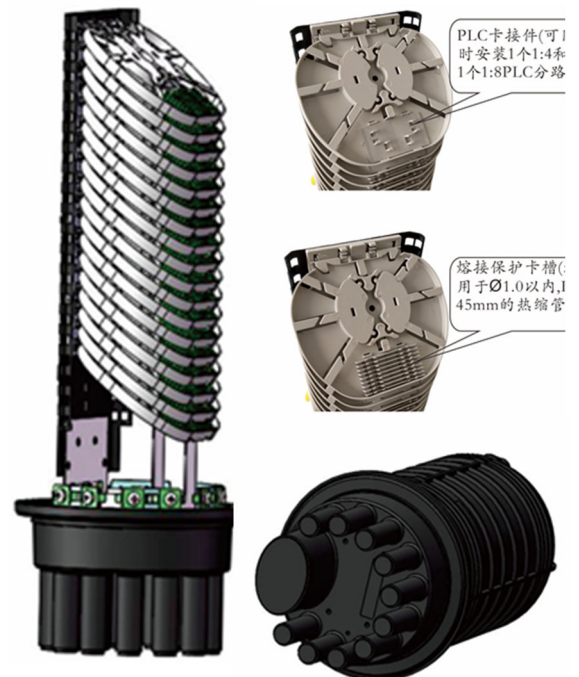

Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|--------------|-------|----------------------------------|----------------------|-------|
| | | Splice Cores | Trays | | | |
| Modified PP | H*D (mm) 440*230 | 288Cores | 16F | 1 x oval port 10 x round port | Heat-Shrinkable Seal | Black |



Fiber Optic Splice Closure-Vertical type/Dome type

Fiber Optic Splice Closure VERTICAL TYPE : M17-RS-A

Heat-Shrinkable sealing structure.

High quality industrial plastic body material

1 oval hole and 16 round holes for cable entrance

Suitable for cable diameter 7mm-27mm

Support aerial, underground, pipeline, man holes, hand holes

Protection level reaches IP68



360 degrees access, fiber bending > 40mm

Maximum capacity:

432 fibers.

Number of splice trays:

26 pcs x 16F

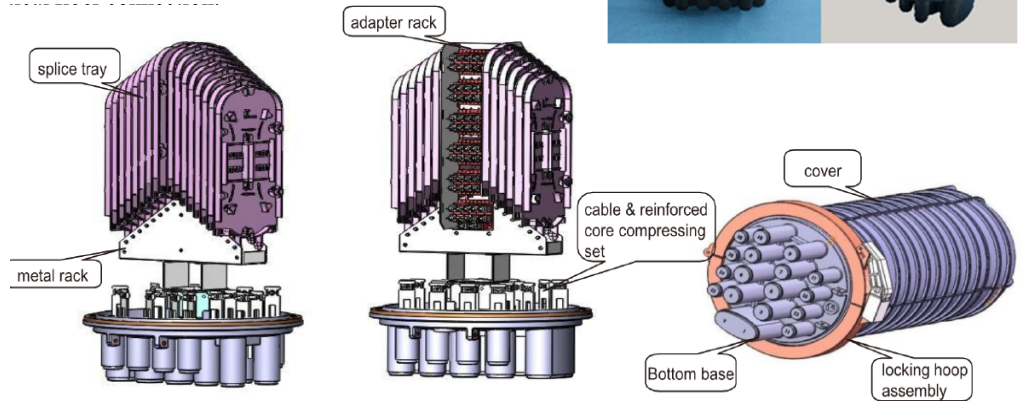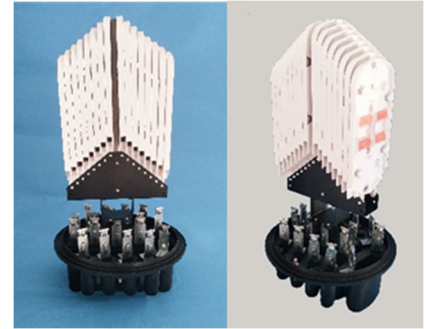

Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|---------------------------|------------------|----------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 510*325 | Splice Cores 432 Cores | Trays 12F/16F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |

Fiber Optic Splice Closure VERTICAL TYPE : M17-RS-B

Heat-Shrinkable sealing structure

High quality industrial plastic body material

1 oval hole and 16 round holes for cable entrance

Suitable for cable diameter 7mm-27mm

Support aerial, underground, pipeline, man holes, hand holes

Protection level reaches IP68



360 degrees access, fiber bending > 40mm

Maximum capacity:

576 fibers.

Number of splice trays:

56pcs x 8F

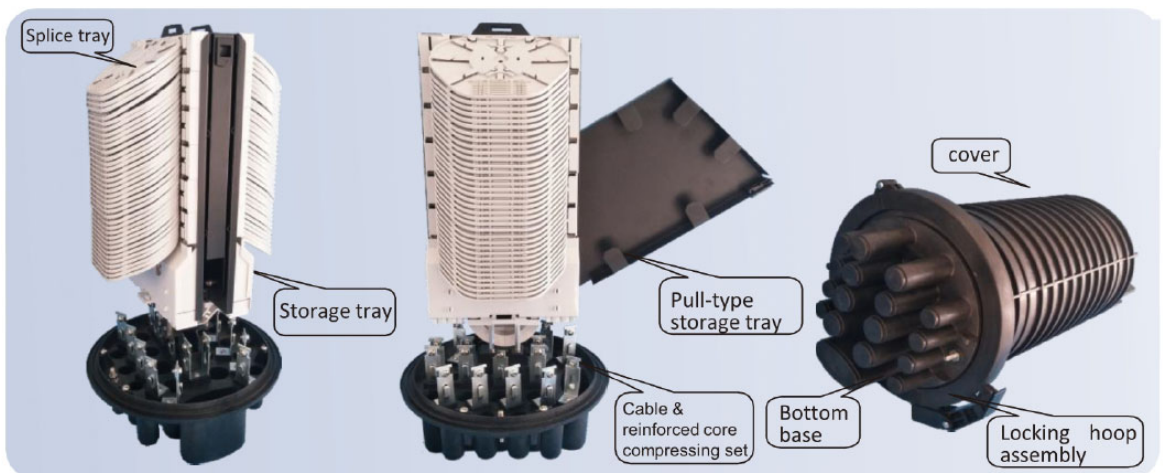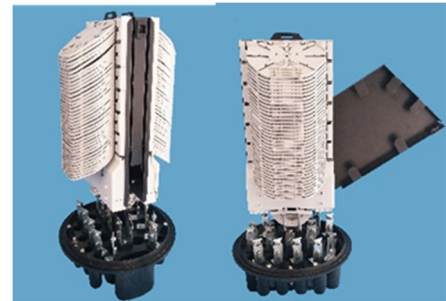


Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|---------------------------|-------------|----------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 510*325 | Splice Cores 576 Cores | Trays 8F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |



Fiber Optic Splice Closure VERTICAL TYPE : M17-RS-PLC

Heat-Shrinkable sealing structure.
 High quality industrial plastic body material
 1 oval hole and 16 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 288fibers.
 Number of splice trays: 24 pcs x 12F
 Splitter: 4pcs of 1x16 PLC Splitter

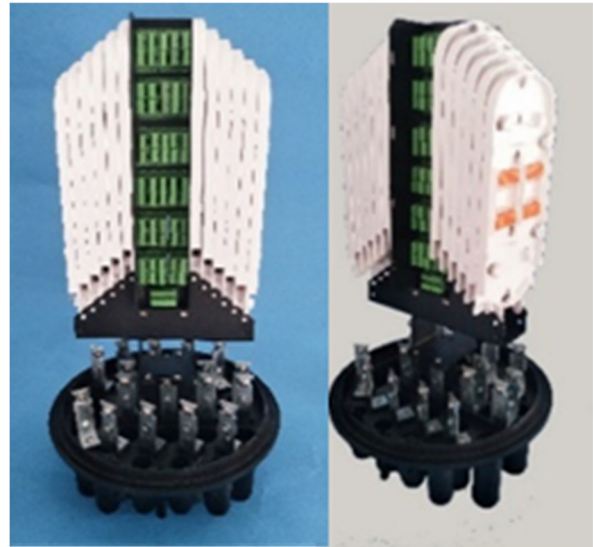


Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|---------------------------|-----------------|----------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 510*325 | Splice Cores 288 Cores | Trays 24x12F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |

Fiber Optic Splice Closure VERTICAL TYPE : M17-RS-A2

Heat-Shrinkable sealing structure
 High quality industrial plastic body material
 1 oval hole and 16 round holes for cable entrance
 Suitable for cable diameter 5mm-30mm
 Support aerial,underground,pipeline,man holes,hand holes
 Protection level reaches IP68
 360 degrees access, fiber bending > 40mm
 Maximum capacity: 1152 fibers.
 Number of splice trays: 16pcs x 72F

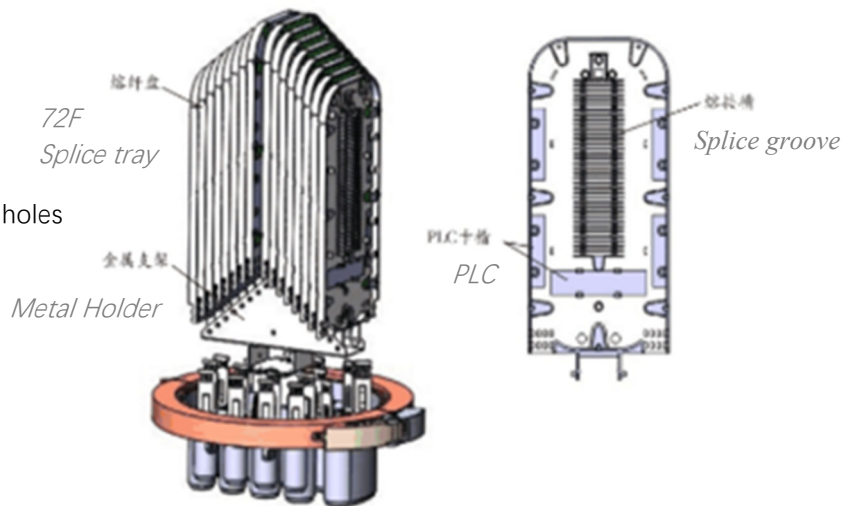

Configuration

| Material | Size | Max Capacity | | Cable Entrance | Sealing Mechanism | Color |
|-------------|---------------------|----------------------------|-----------------|----------------------------------|----------------------|-------|
| Modified PP | H*D (mm) 510*325 | Splice Cores 1152 Cores | Trays 16x72F | 1 x oval port 16 x round port | Heat-Shrinkable Seal | Black |