

DATASHEET

Visual Fault Locator

STRONG LIGHT SOURCE, STABLE PERFORMANCE



RoHS



OMC INDUSTRY CO.LIMITED

STRONG LIGHT SOURCE, STABLE PERFORMANCE

Specification:




Part NO.	BML-205-1	BML-205-10	BML-205-15	BML-205-20	BML-205-25	BML-205-30
Output Power	> 1mW	> 10mW	> 15mW	> 20mW	> 25mW	> 30mW
Dynamic Distance	3~5 km	8~10 km	> 10km	> 10km	> 10km	> 10km
Wavelength	650nm 20nm					
Operation Mode	Pulsed(2Hz) and CW					
Connector	2.5mm UPC(or customize 1.25mm UPC)					
Size(H*W*D)	175mm * 26mm * 26mm					
Weight	80g					

How to Use it?



Suit for Below connector

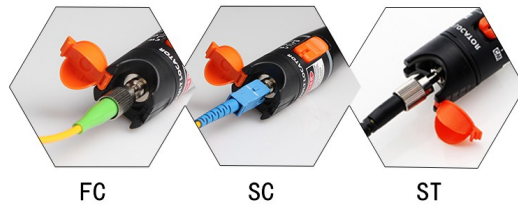


Features:

- Bright red laser at 650nm
- Pulsed and CW operation
- Standard AA alkaline batteries
- Fast locate the broken point
- Rugged and waterproof design
- 2.5mm universal connector



Metal 2.5mm port Laser

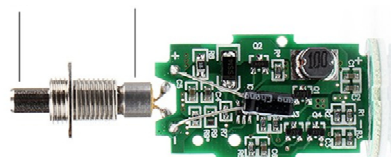

ACCESSORIES

Standard



Quick Guide*1



Soft Bag*1



Packing Box*1

Op-



2.5mm to 1.25mm adapter