
DATASHEET

Fiber Distribution Box-FDB-12B-3

For FTTH, PON ,OBD Cabling system



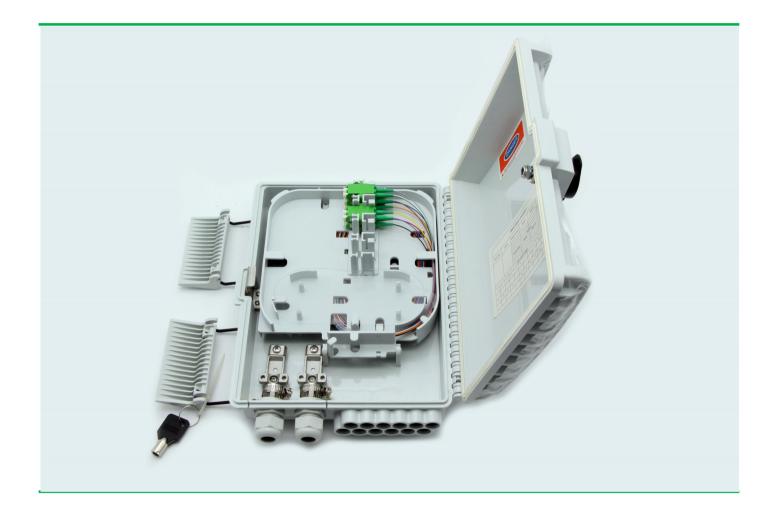

2018|En version1.0 0086-755-29163551

sales@omcftth.com



Description:

This Lockable IP65 distribution box is supplied loaded or unloaded and offers the ability to terminate 12 fibers housed in a strong robust ABS enclosure for indoor and outdoor applications. This terminal box terminates up to 1-2 fiber optic cables, offers spaces for splitters and up to 12 fusions, allocates 12SC adapters and working under both indoor and outdoor environments. It is a perfect cost-effective solution-provider in the FTTX networks. Accommodates splitters and up to 12 SC simplex adapters , Max allowance for entry cables: max diameter 15mm, up to 1 cable, Max allowance for exit cables: Up to 12 simplex cables

Specification:

Model	FDB-12B-3		
Adapter	12pcs of SC /24pcs of LC		
Cable Ports	2 ln/12 out		
Applicable cable OD	7-15mm		
Box Dimensions(mm)	248x189x72		
Material	ABS/ABS+PC	T T	
Max capacity(F)	24		
Installation method	wall mount and pole mount		

Standard Accessories

Labeling paper, abrasive paper, self-adhesive positioning block, heat-shrink protective sleeves, nylon tie, insulation tape, fixing screws.

Application

Widely used in FTTH access network.
Telecommunication Networks
CATV Networks
Data communications Networks
Local Area Networks

Operation conditions:

Temperatures: -40°C -- 60°C Humidity: 93% at 40°C Air Pressure: 62kPa – 101kPa

Features

IP 65 Rating for external use Lockable door for added security
Integrated cable tie points for securing incoming cable
Up to 12 splice & SC connection points
Removable splice tray for easy installation
Accepts loose tube, distribution and pre-terminated cables
Integrated bend radius protection
Removable door for ease of installation
Supplied with 12 heat shrink splice protectors
Supplied with transit tubing
Supplied with wall fixings and tie wraps
ROHS, REACH & SvHC compliant



Product advantages



1, Waterproof cover for lock



2, Stainess lock, Long Life guarantee



3, Auxiliary locking device, Offer IP65 protection





4, Directly Adapter Install design, Easy operation

7, Available for Blockless PLC splitter Installation



5, Stainless steel hose clamp, Guarantee the input cable fixed well and longer life



6, Available for WALL MOUNT AND POLE MOUNT

: :

8, Available for ABS Cassette PLC splitter Installation



10, soft seal rubber Offer good protect for cables



9, Rubber cover For Spliced fiber, Good protection

sales@omcftth.com